



Heterogeneous Wireless Network

Professor Kazuhiko Kinoshita

Spectrum
sharing

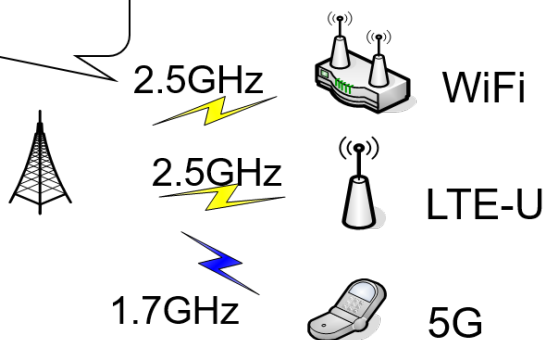


Fig.1 Spectrum Sharing

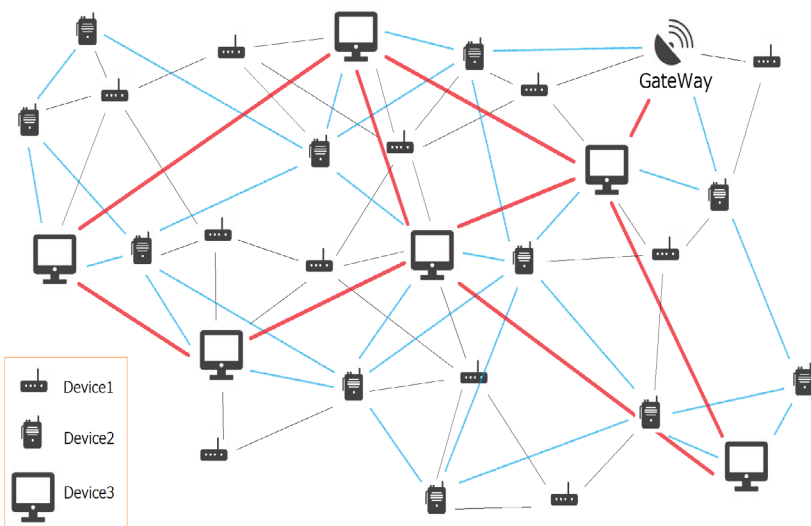


Fig. 2 Wireless Multi-hop Network for M2M/IoT Services

The number of wireless network users has remarkably grown by recent advances in wireless communication technologies such as Wi-Fi and 5G. This has led to a lack of spectrum resources, which has therefore become an important issue. To overcome this problem, spectrum sharing technology, whereby a Wi-Fi system temporarily uses a spectrum band of a WiMAX system, is receiving much attention. We propose a dynamic spectrum sharing method for ultimate utilization of wireless communication resources.

In addition, new services based on M2M (Machine-to-Machine) and/or IoT (Internet of Things) communications are also attractive. In such a network, tremendous number of terminals including sensors, actuators, etc. are connected, so that traditional networking technologies does NOT work well. We propose a new network platform to support M2M/IoT services in a unified manner.

Specifically, we research on the following topics.

- Efficient spectrum sharing
- Dynamic cell area optimization
- Routing, buffer control, and channel assignment method in heterogeneous wireless multi-hop networks

Keywords: wireless network, spectrum sharing

E-mail: kazuhiko@is.tokushima-u.ac.jp

Tel.: +81-88-656-7495

Fax: +81-88-656-7495

Content-based Multimedia Information Retrieval Systems

Professor Masami Shishibori

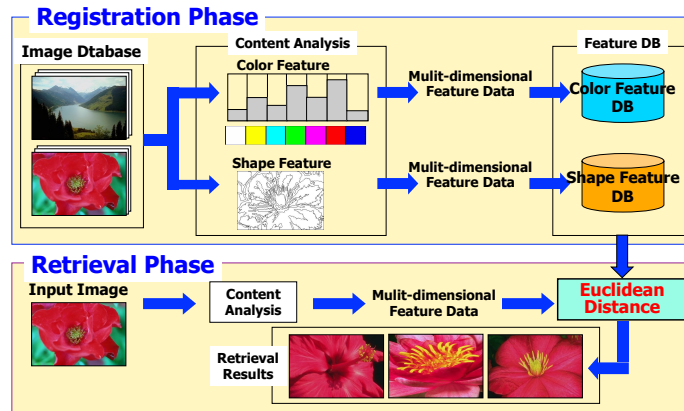


Fig.1 An example of content-based image retrieval systems

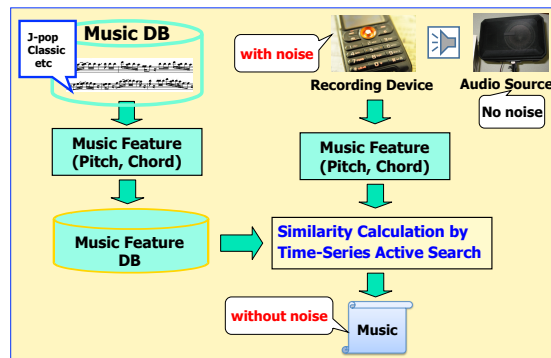


Fig.2 Noise robust music retrieval system

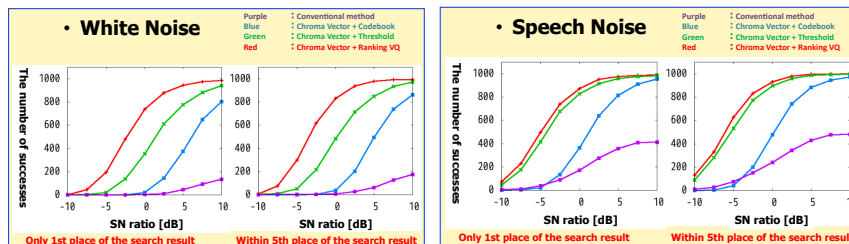


Fig.3 Experimental results on music retrieval systems

Content:

Multimedia Information Retrieval (MMIR) is one of active research fields of the computer science. An example of Content-based Image Retrieval systems (CBIR) is shown in Fig.1. CBIR can be organized in two important modules: Content analysis module extracts semantic features from images and affects the search accuracy. Feature indexing module classifies the similar features into the same category and affects the retrieval speed. Our research group developed the fast search engine as the feature indexing module.

As for video data, our group has participated the TREC Video Retrieval Evaluation (TRECVID) since 2005. Some content-based video retrieval systems were developed for the Instance Search task of the TRECVID.

As for music data, conventional systems use text data as the query, such as song titles, singer names, and so on. Our systems can search the similar music to humming and noisy data. On the noise robust music retrieval system (Fig.2, Fig.3), the user inputs the part of music data with white and speech noise, and then this system can search the similar music without the noise.

Keywords : search engine, intelligent systems

E-mail: bori@is.tokushima-u.ac.jp

Tel. +81-88-656-7508

Fax: +81-88-656-7508

HP : <http://pub2.db.tokushima-u.ac.jp/>

ERD/person/10762/profile-en.html





Faculty of
Science and
Technology
Tokushima University


Image Sensing of Complicated Motion and Indistinct Shape Objects

Professor Kenji Terada


■ Fire Detection




■ ITS





■ Quality of Skill





■ Environmental Preservation



■ Agriculture Application



■ Human Behavior Observation



Content:

Image Sensing of Indistinct Shape Objects

Image Sensing of Complicated Motion Objects

■ Fire Detection

e.g. Detection of smoke and fire frame by image processing

■ ITS(Intelligent Transport Systems)

e.g. Crosswalk observation by image processing

■ Environmental Preservation

e.g. Dust counter system by image processing

■ Evaluation of Quality of Skill

e.g. Evaluation of quality of AWA dancing skill by image processing

■ Agriculture Application

e.g. Insect counter system by image processing

■ Human Behavior Observation

e.g. Observation of computer room by image processing

Keywords: Computer Vision, Image Processing,
Image Sensing, Image Recognition

E-mail: <terada@is.tokushima-u.ac.jp>

Tel. +81-88-656-7499

Fax: +81-88-656-7499

HP : <http://www-b1.is.tokushima-u.ac.jp/>







Faculty of
Science and
Technology
Tokushima University

Metaheuristics for large combinatorial optimization problems


Professor Yuichi Nagata



A best-known solution of the well-known Mona-Liza TSP benchmark ($n=100,000$) found by our genetic algorithm.



A best-known solution of one of the well-known benchmarks of the VRP found by our memetic algorithm.

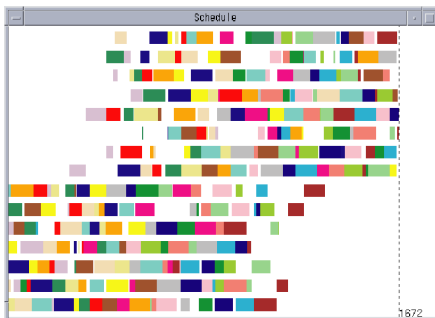

A best-known solution of one of the well-known benchmarks of the JSP found by the proposed algorithm.

Content:

Metaheuristics are approximate methods used for solving hard combinatorial optimization problems. The field of metaheuristics for the application to combinatorial optimization problems is a rapidly growing field of research. This is due to the importance of combinatorial optimization problems for the scientific as well as the industrial world. In our research, we develop very powerful approximate methods for many combinatorial optimization problems.

1. The traveling salesman problem (TSP) is one of the most cited NP-hard combinatorial optimization problems. We have developed a very powerful genetic algorithm (GA) for the TSP, finding very high-quality solutions on instances with up to 200,000 cities. A similar approach also shows a very good performance for solving vehicle routing problems.

2. Job shop scheduling problem (JSP) is one of the most studied scheduling problems in the OR community. We have developed a very powerful approximation algorithm for the JSP. The proposed algorithm is based on a new metaheuristic framework, which incorporates constraint propagation techniques into a local search framework.

Keywords: metaheuristics, combinatorial optimization

E-mail: nagata@is.tokushima-u.ac.jp

Tel. +81-88-656-7505

Fax: +81-88-656-7505

HP :






Faculty of
Science and
Technology
Tokushima University

Hand motion recognition using wrist EMG

Professor Minoru, Fukumi

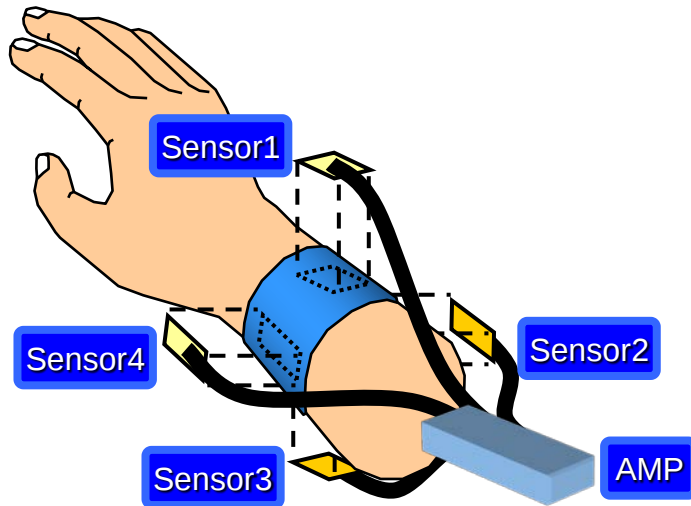

(a) Wrist EMG measurement



(b) On-line recognition of rock-paper-scissors

Content:

In this research, finger motions are recognized by EMG (electromyography) signals measured using dry-type electrodes attached to wrist. Target behaviors to be recognized are four finger motions that the Janken, “rock”, “paper”, “scissors” and when not doing anything “neutral”. EMG signal measured in wrist is unstable and noisy compared to forearm and upper arm. However wrist EMG can be applicable to control of wearable devices.

On the one hand, we developed the Simple-FLDA (approximated version of Fisher linear discriminant analysis), which resolved three drawbacks in matrix-type FLDA. This algorithm allows a statistical on-line learning of approximated eigenvectors for the high-dimensional EMG signals. We can obtain a high recognition accuracy for hand motions using these eigenvectors.

In the next step, we try to recognize every wrist and finger motion and develop a total control system for wearable devices using wrist EMG, including the use of deep learning.

Keywords: EMG, Simple-FLDA, Statistical learning

E-mail: fukumi@is.tokushima-u.ac.jp

Tel. +81-88-656-7510

Fax: +81-88-656-7510

HP : <http://titan.is.tokushima-u.ac.jp/~fukumi/>



High speed and compact methods for string retrieval by double array structures

Professor Masao Fuketa

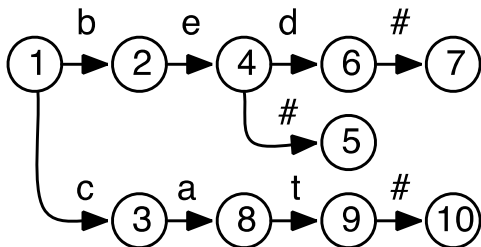


Figure 1 Example of a trie

	1	2	3	4	5	6	7	8	9	10
BASE	1	1	2	1	-1	3	-2	1	6	-3
CHECK		1	1	2	4	4	6	3	8	10
	#	a	b	c	d	e	t			
CODE	4	6	1	2	5	3	7			

Figure 2 Example of a double array structure

Content:

Retrieving strings is used in many applications and a very important technology. Retrieval speed and saving memory are required for string retrieval. A trie (Figure 1) is one of data structures to retrieve strings, and a double array (Figure 2) is one of retrieval methods by using the trie. As large string sets are frequently used due to development of Internet, compact data structures such as LOUDS are used. The speed of the compact data structure is very slow compared with the double array.

Hence, my research is to save memory with maintaining the high speed of the double array. By constructing the double array for each depth of trie, values of BASE and CODE are determined for each depth, and then reduction of number of bits representing BASE values and saving memory of double array are achievable. Moreover, a method to reduce number of bits representing CHECK values is under investigation.

Furthermore, this research applies to similar string retrieval and DNA sequence retrieval.

Keywords: trie, data compression, database

E-mail: fuketa@is.tokushima-u.ac.jp

Tel. +81-88-656-7564

Fax: +81-88-655-4424




Professor Hiroyuki Mitsuhashi

Enhancing interactivity and reality of evacuation training



Mainly training school students to be survivors



Applying Pokémon GO's idea to disaster education



Superimposing
virtual disaster
situations (CG) onto
the real-time vision



Anyone can encounter disasters. People should learn how to survive disasters and recognize that disasters are not someone else's problem. However, traditional disaster education has not yet been established. For example, in traditional evacuation training, participants simply follow a fixed route in a normal situation. Disaster education should be improved by ICT to be more interactive and realistic.

My research team aims to develop new disaster education systems using ICT (e.g., VR/AR, digital game, and mobile systems) and practice the systems mainly in schools.

- VR/AR-based Evacuation Training Systems
- Evacuation Training System using LBG (Location-based Game)
- LBG-based System for Learning Local Disaster Management
- AR-based System for Visualizing Disaster Situations

HP: <http://pub2.db.tokushima-u.ac.jp/ERD/person/73176/profile-en.html>






Faculty of
Science and
Technology
Tokushima University

Biomedical Imaging using Ultrasound

Specially Appointed Professor Makoto Yamakawa


◆ Ultrasound Tissue Elasticity Imaging

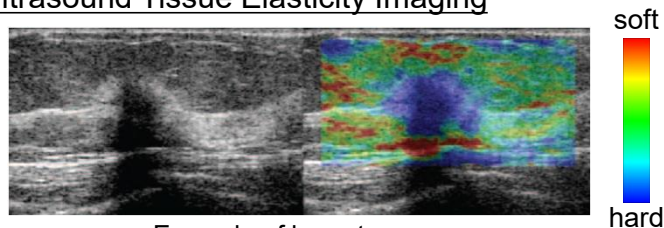

Example of breast cancer

A. Ito, et al., Radiology, 2006.

◆ Photoacoustic Imaging

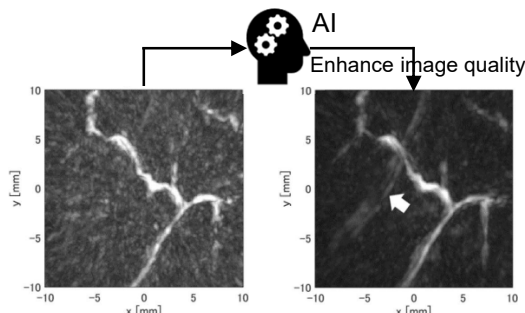


M. Yamakawa, et al., JMU, 2024.

Example of vascular image of the palm

K. Nagae, et al., F1000Research, 2019.

◆ Computer-Aided Diagnosis of Ultrasound Images

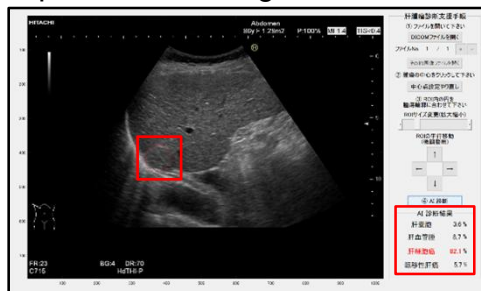

Example of CAD for liver tumor

We use **ultrasound**, a safe technology for living tissues, to visualize the following types of biological information:

- Morphological information
- Functional information
- Characteristic information

Our aim is to provide information that is useful for diagnosing diseases and planning surgeries.

<Examples of our research topics>

◆ Ultrasound tissue elasticity imaging

(Ultrasound elastography)

- Motion vector estimation
- Tissue viscoelasticity estimation

◆ Photoacoustic imaging

- Expansion of sensor density, aperture, and bandwidth using deep learning

◆ Computer-aided diagnosis of ultrasound images

- Detection and classification of liver and breast tumors using deep learning

Keywords: Ultrasound, Biomedical imaging,

Deep Learning

E-mail: yamakawa@tokushima-u.ac.jp

Tel. +81-88-656-9684

Fax: N/A






Faculty of
Science and
Technology
Tokushima University

Gap based Analysis of Subspace Identification Method

Associate Professor Kenji Ikeda

<図表>

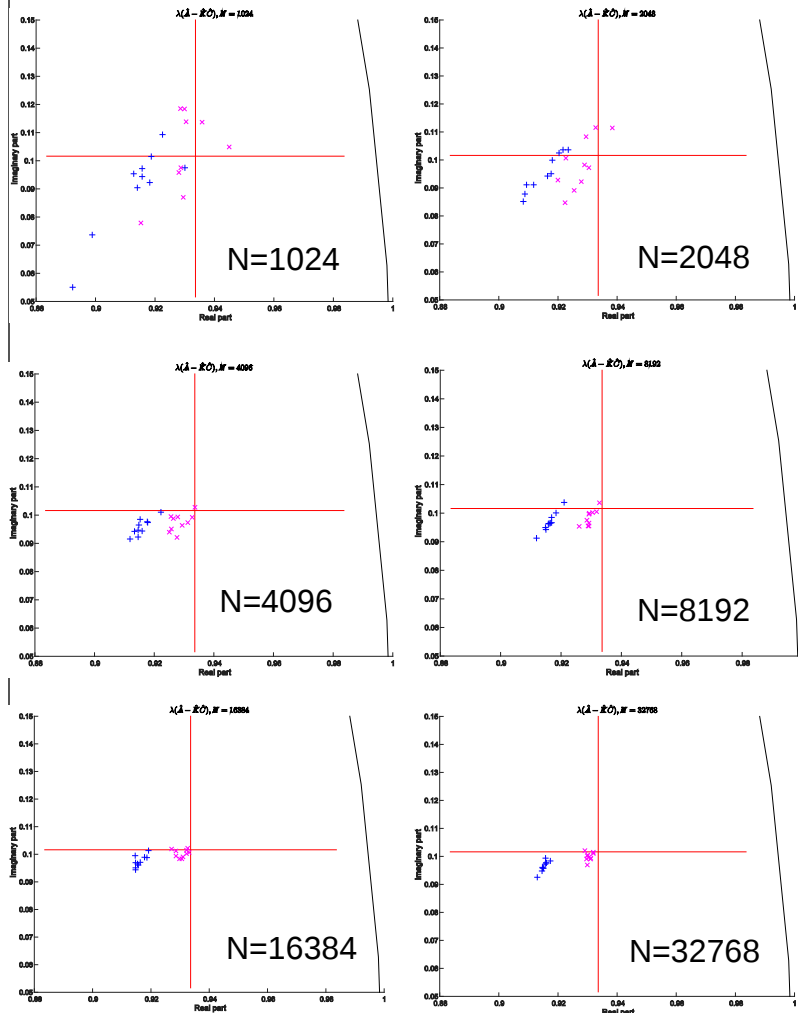

Content:

Control engineering is a highly developed fundamental discipline of the engineering, in which systematic design methods of control systems are developed based on the optimization by using mathematical models of the plant. System identification is one of fields in the control engineering which estimates the plant model systematically from input/output data of the plant. Subspace identification is a comparatively new method and has attracted attention from the middle of the 1990s. However, we have to say its analysis on the mathematical characteristics such as the variance of the estimate are not sufficient.

We have proposed a variance analysis method based on the gap between the singular subspaces spanned by some data matrix which enables us to compare several subspace methods and determine optimal design parameters, etc.

We are now proposing consistent estimates of Kalman gain and the covariance matrix of the innovations process. Only asymptotically consistent estimates of them are proposed in the conventional methods. So, more accurate variance of the estimates will be evaluated.

Keywords: System Identification, Subspace identification, Variance analysis

E-mail: <iked@is.tokushima-u.ac.jp>

Tel. +81-88-656-7504

Fax: +81-88-656-7504



Faculty of
Science and
Technology
Tokushima University

Electroencephalogram Analysis Considering Personality

Associate professor Shin-ichi Ito

Medical and habilitation field

- To grasp human conditions
- To deliver appropriate service

**Common field:
Ambient BCI**

Industrial field

- Human-centered system
- Downsizing of devices



To control
exogenous
stimulus
using BCI

Individual Characteristic analysis Based on EEG analysis

Issues

- Intra- and inter- individual characteristic



Solutions

- To consider human personality
- To propose methods based on gray model

**Novelty
algorithm**

【Ambient Brain Computer Interface】

• Concept;

This study constructs novel electroencephalogram (EEG) interface, which is ambient BCI, based on EEG analysis techniques. Final goal of this study is to create the assist system for therapy.

• Applications

- To detect an inclination, thinking, preference, uncomfortable feeling
- To control exogenous stimulus

【Individual Characteristic Analysis in EEG】

• Concept;

This study analyzes an intra- and inter-individual characteristic in EEG. One is affected by the influence of personality. We propose a method to analyze the EEG considering personality. Also, the proposed method employ a technique based on gray model.

• Applications

- To make new EEG interface
- To detect the human habit

Keywords: EEG, stimulus, personality

E-mail: sito@tokushima-u.ac.jp

Tel. +81-88-656-9858

Fax: +81-88-656-9858

HP : <http://pub2.db.tokushima-u.ac.jp/ERD/person/189119/profile-en.html>




Faculty of
Science and
Technology
Tokushima University

Research on Kansei Information Processing and Kansei Robotics

Associate Professor Kazuyuki, Matsumoto

Human-Friendly Kansei Robot

Understand human emotions,
personalities and relations

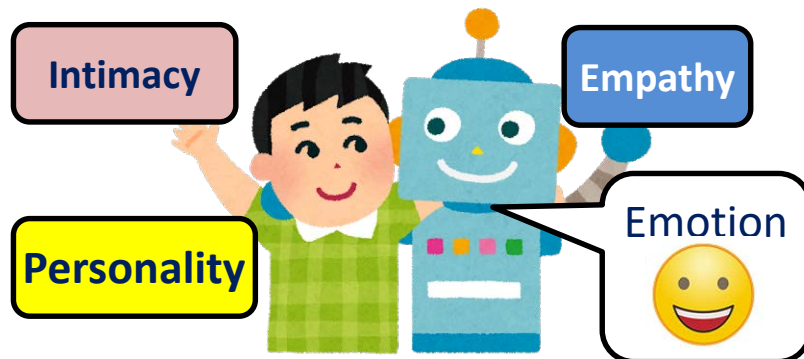

Emotion
Estimation

Reputation
Analysis

Personality
Analysis

Conversion of Slang
to Standard Word

Intimacy
Estimation

Analysis of Non-verbal Expression on Web

Application to nursing and caring

Content:

In order to construct human-friendly kansei robots, my research mainly focuses on kansei estimation from language and reputation analysis. Individual messages on Social Networking Sites (SNS) are effective to find out latest trends or public opinions. However, we might miss important information in the analysis due to the words that are not included in the existing dictionaries. Considering that such newly-coined words are often representing personal emotions or the trends of the times, it would be important to construct a dynamic and effective dictionary for reputation/opinion mining analysis. The meanings or frequency of use of the newly-coined words also change depending on the communities in which they are used, and their meanings or tendency of usage receive a lot of influence from the times. Therefore, it would be necessary to adjust the information regarding their sensitivity, usage, degree of importance, etc. properly according to the environments in which they are used. My study deals with how to effectively extract knowledge to automatically construct an effective dictionary that can be updated automatically according to analysis purposes. If the proposed method is realized, more accurate analysis of reputation or flame based on SNS would be possible.

Keywords : Affective Computing, Kansei Information Processing, Kansei Robotics

E-mail: matumoto@is.tokushima-u.ac.jp

Tel. +81-88-656-7654

Fax: +81-88-656-7654





Construction of Impression Knowledge from Words

Associate Professor Kazuhiro, Morita

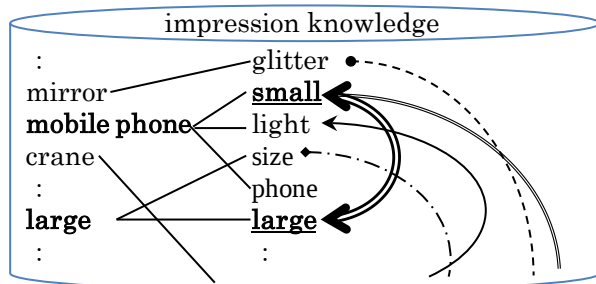
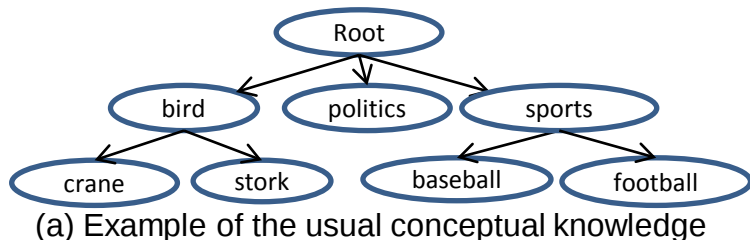


Fig. 1 Outline of impression knowledge

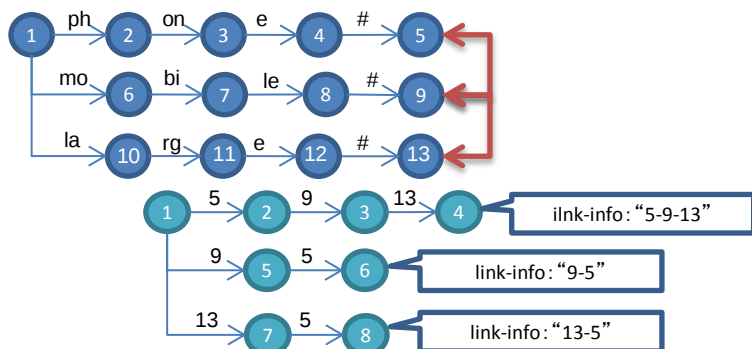


Fig. 2 Dictionary structure of impression knowledge

Content:

The technology that correctly understands the demand of human is important for the achievement of a man-machine interface with kindness to the person. The semantic understanding is processed by constructing the knowledge of the concept base, ontology and so on in the field of natural language processing. For example, "The stork carries" becomes "<bird>+(carry)" by acquiring the semantic concept, however, in this case, it is thought that "{happiness}+(carry)" is correct understanding. Thus, an interpretation different from the meaning of the surface is needed to understand the meaning from metaphor, metonymy, onomatopoeia and so on. The sensibility and the impression should be stored as knowledge.

This research aims to understand the intention by constructing the impression felt from words as impression knowledge. The constructed impression knowledge connects with words and the impression as shown in Fig. 1(b). To store these in the dictionary as the indexes, the dictionary structure shown in Fig. 2 is constructed.

Keywords: impression knowledge, knowledge dictionary

E-mail: kam@is.tokushima-u.ac.jp

Tel. +81-88-656-7490

Fax: +81-88-655-4424




Faculty of
Science and
Technology
Tokushima University


Safety Driving Assistance System using Driving Behavior

Associate Professor Momoyo Ito

Driver's Head Posture Categorization

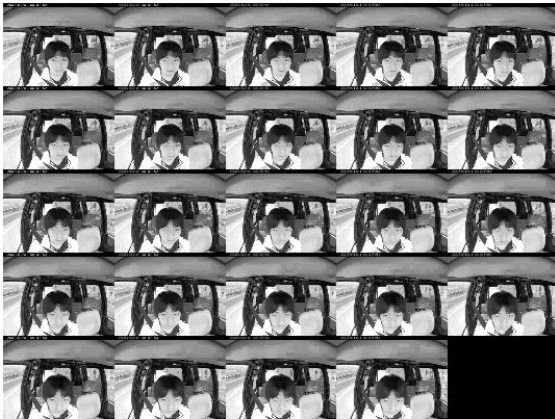

(a) Frontal face category

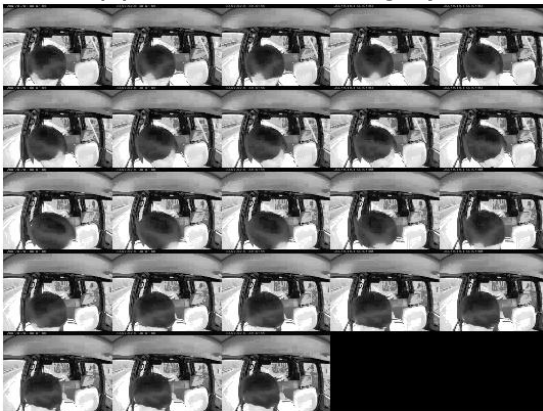

(b) Deep head bending category

Head posture classification example..

Content:

This study aims to construct a driver assistance system that is able to detect such driver deviations. The system detects deviation using time-series head motion information. We analyze driver's head posture during safety verification and propose a method for classifying head posture using two types of unsupervised neural networks: Self-Organizing Maps (SOMs) and fuzzy Adaptive Resonance Theory (ART). The proposed method has a feature based on the hybridization of two unsupervised neural networks with a seamless mapping procedure. The proposed method can generate the optimal number of cluster-generated labels for the target problem. We experimentally assess the effectiveness of the proposed method by adjusting the fuzzy ART network vigilance parameters. In addition, we indicate that driver's head posture during safety verification can be categorized according to their individual properties.

Keywords: intelligent transport system, driving behavior analysis, machine learning

E-mail: momoito@is.tokushima-u.ac.jp

Tel. +81-88-656-7512

Fax: +81-88-656-7512



Research of Intelligent Music Information Processing System

Lecturer Masaki Oono

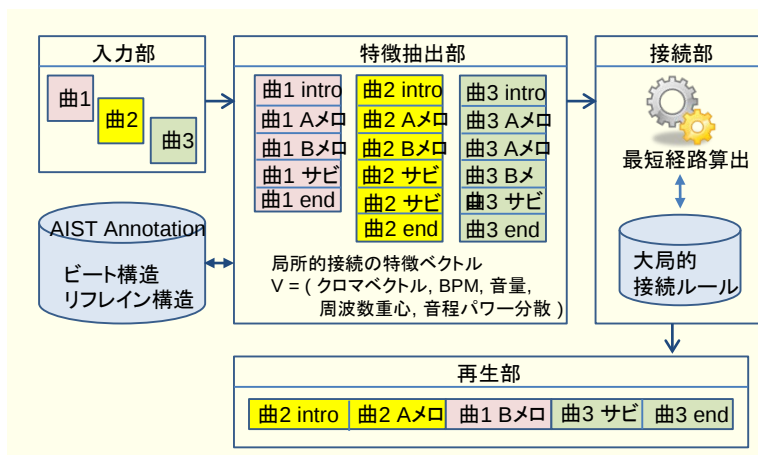
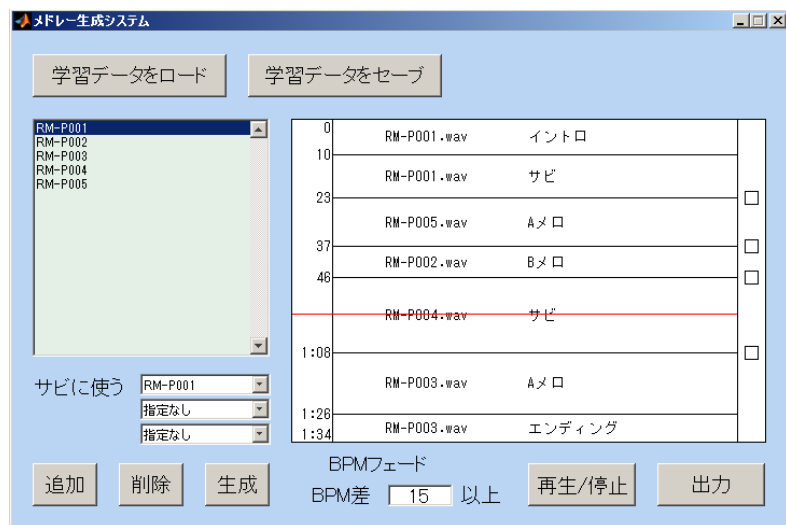


Figure 1 Medley song generation system

From the point of view of engineering, my research is focused on music information processing to search music efficiently, to manage music easily, and to enjoy music more and more.

(1) Music information retrieval system based on audio fingerprint

An audio fingerprint is condensed digital summary, deterministically generated from an audio signal that can be used to identify and audio sample or quickly locate similar items in an audio database. We research an algorithm to extract audio fingerprint and to retrieval music efficiently.

(2) Audio synthesis system for music appreciation

We research audio synthesis techniques to listen music interactively. For example, medley generation system and music summarization system.

(3) Structural analysis of music

We research signal processing techniques such as beat tracking system, chord recognition system, structural segmentation system.

Keywords : Music information processing

Music information retrieval

E-mail: oono@tokushima-u.ac.jp

Tel. +81-88-656-4735>






Faculty of
Science and
Technology
Tokushima University

Multimedia Data Pattern Recognition

Asso.Prof. Stephen Karungaru

- Human behavior recognition

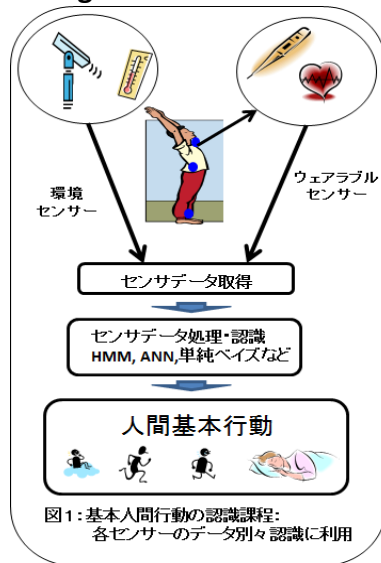

- Intelligent Transportation Systems



Content:

- Research Topics
- Road signs recognition/ safe driving assist technology
- Vehicle recognition and tracking using surveillance cameras
- Human Action recognition using wearable sensors
- QR code analysis using smart phone
- Surveillance camera based human action recognition
- Kanji character recognition using smart phone
- Human tracking and recognition using an Air-drone
- Sports skill assisting technology

Keywords: Pattern recognition, Wearable sensors

E-mail: Karungaru@tokushima-u.ac.jp

Tel. 088-656-7488

Fax. 088-656-7488

HP : <http://www-b1.is.tokushima-u.ac.jp>



Studies on Personal Area Wireless Networks and Virtual Reality Assisted Network Simulations

Associate Professor Alberto Gallegos Ramonet

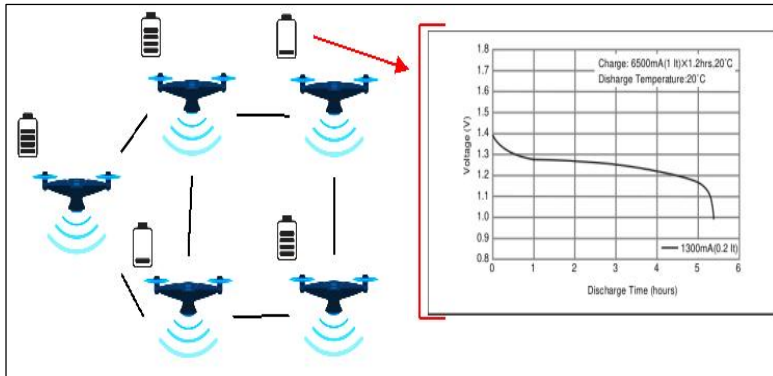


Fig 1. Multi-hop wireless network set on drones. Drones autonomous navigation and communication considers de battery discharge status of each individual drone.

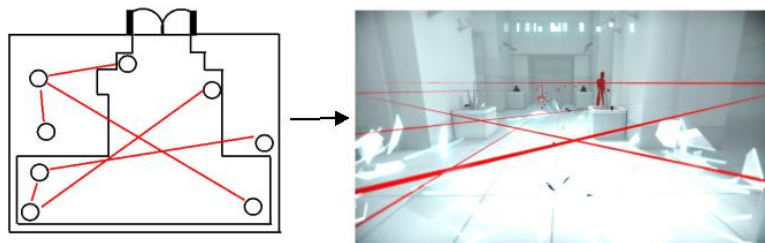


Fig 2. Simulation of a realistic personal area wireless network using the help of a Virtual Reality environment.

During the past few years, the interconnectivity between small devices have rapidly increased. These devices communicate with one another through networks used in appliances in our homes, medical equipment, security and monitoring devices. The networks used by these small devices are often limited and impose many challenges. Furthermore, these networks may or may not be connected to the Internet. While these type of networks are often overlooked, they are one of the pillars that supports IoT (Internet of Things) and the development of future networks. In these research, the following topics are studied:

- Development of new communication protocols for personal area and body area networks (IEEE 802.15.4 & IEEE 802.15.6).
- Measurement of energy consumption and development of energy efficient algorithms used in radio transceivers and vehicles (e.g. drones)
- Development of simulation tools that support the development of these networks: (A) Simulated networks using virtual reality environments. (B) Simulated energy models for batteries and radio transceivers.


Keywords: Personal Area and Body Area Wireless Networks, Network Protocols, Energy efficient Networks, Network Simulation tools, Networks on Virtual Reality Environments.

E-mail: alramonet[at]tokushima-u.ac.jp


Research of Early Depression Detection & Research of Dialogue Quality Evaluation and Domain-Specific Dialogue Generation

Associate Professor Xin, Kang

Early Detection of Depression

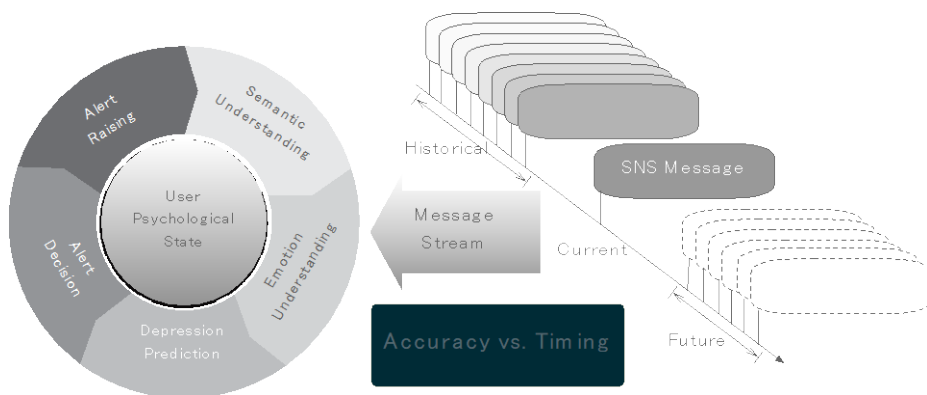

Dialogue quality evaluation & Domain-Specific Dialogue Generation

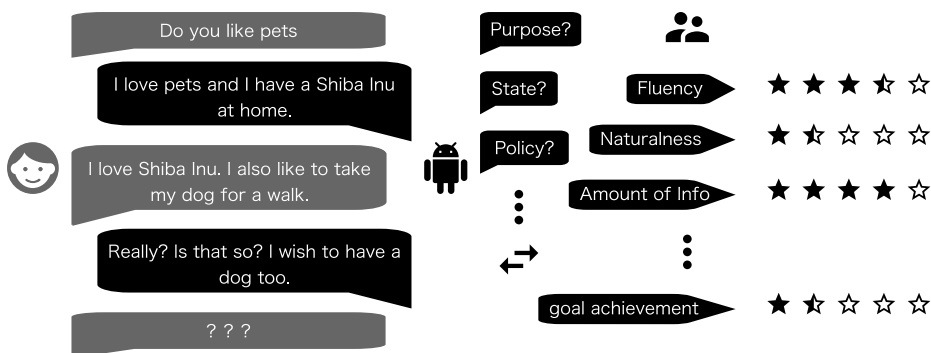

Early detection of psychiatric disorders has become an important issue for psychological treatment and rehabilitation. In this research we use semantic and emotion understanding modules for analyzing message streams of SNS users and propose a model for predicting their depression probabilities while learning a policy for raising the alert of depression as soon as possible. Alerts can be provided to SNS users or to the medical and hygiene institutions for further treatments. In this study, we examine various machine learning methods in order to resolve the contradiction between two important targets, that is, the detection accuracy and the alert raising time.

The rise of voice assistants such as Siri and Alexa is inspiring new researches for developing human-like dialogue systems. However, as the conversation scenario or purpose varies, uniformly defining “humanity” in the generated dialogues still challenges the academic society. Without clear constraints such as “humanity” to the learning target, dialogue systems tend to generate semantically conflicting or even ethically violating utterances, which are unacceptable in many real-world use cases. This research focuses on service counter conversation and psychological counseling conversation and experimenting psychological theories with various machine learning methods for automatically evaluating the humanity of dialogue systems while improving the quality of generated dialogues.

Keywords: NLP, Early Risk Detection, Dialogue Quality Evaluation, Dialogue Generation

E-mail: kang-xin@is.tokushima-u.ac.jp

Tel. 088-656-9912

Fax: 088-656-9912

HP : <https://researchmap.jp/kang-xin>





Interactive Text Mining on a Corpus

Lecturer Minoru Yoshida

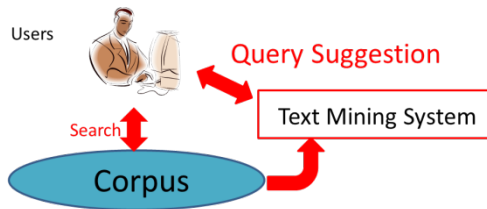


Fig.1: Workflow: Query Suggestion by Text Mining



Fig.2: Our System: Query Suggestion by Text Mining



Fig.3: Mining Numbers on Text

Content:

The amount of electronic texts is rapidly growing, making it difficult to analyze them by humans. We especially focus on “middle data” that is not so big but not small data. Such data includes all Wikipedia pages and operation reports in call centers, etc. We propose a “query suggestion system by real-time text mining.” Text mining is a task to analyze how given words are used in the given corpus (i.e., set of texts). We use the index structure called “suffix arrays” to provide two types of text mining results, namely, usage extraction and synonym extraction, for the given query. (See Figure 2.)

We also propose a system for mining numbers in text. Many numbers are included in text, but most of existing text mining systems treat them as mere strings of digits. We propose a system that provide a function to use “range of numbers” as queries. (See Figure 3.)

Keywords: Text mining, Suffix arrays

E-mail: mino@tokushima-u.ac.jp

Tel. +81-88-656-9689

Fax: +81-88-656-9689






Studies on Non-Terrestrial Networks

Assistant Professor Enping Zhou

The overview of NTN

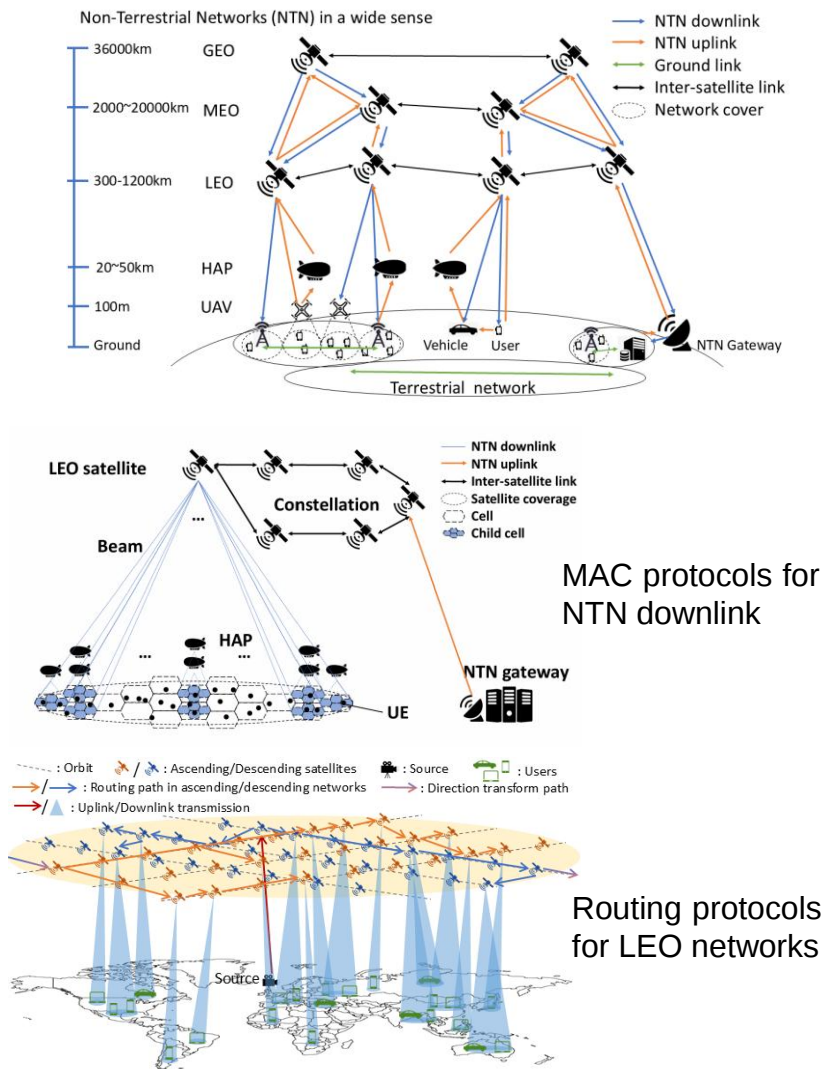

Recent years, Non-Terrestrial Networks (NTN) are gaining considerable attention as next-generation communication infrastructure leveraging aerial and spaceborne platforms. NTN adopt a multilayered architecture, including Low Earth Orbit (LEO) satellites, to complement terrestrial coverage and reduce latency in long-distance communications, offering a promising solution for achieving global, low-latency connectivity.

However, the practical deployment of NTNs presents several challenges, such as dynamically changing topology, communication delays between space and ground segments, and limited frequency and power resources.

This research focuses on the design and optimization of mid-layer protocols that address the unique characteristics and challenges of NTN. Specifically, our primary research topics include:

- MAC protocols for NTN downlink considering packet loss and retransmission mechanisms.
- Routing protocols for LEO networks considering dynamic constellation topologies and demand distributions.
- Resource-allocation optimization in NTNs leveraging deep reinforcement learning (DRL) to adapt to complex and time-varying network conditions.

Keywords: Non-Terrestrial Networks, Mid-Layer Protocols

E-mail: zhou.enping@tokushima-u.ac.jp

Tel. +81-88-615-8616

Fax: +81-88-615-8616




Faculty of
Science and
Technology
Tokushima University

Analysis and Applications of Metaheuristics Utilizing Complex Systems

Assistant Professor Haichuan, Yang


Research 1 :

The algorithm generates complex networks with Poisson or power-law distributions.

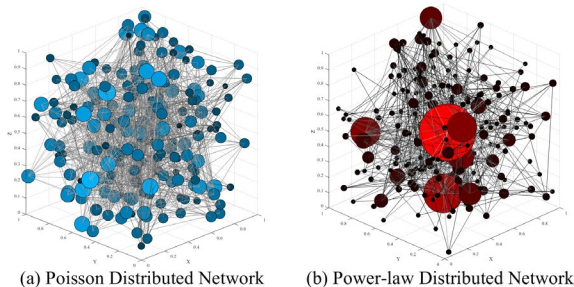

(a) Poisson Distributed Network

(b) Power-law Distributed Network

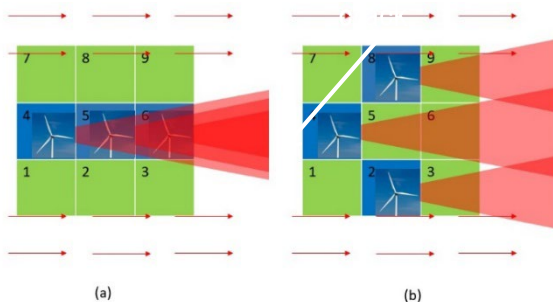

(a)

(b)

Wind Turbine Layout Optimization: From Fig. (a) to Optimized Fig. (b).

Research 2 :

Information Compression via Chaotic Transcription Inspired by Biological Gene Transcription.

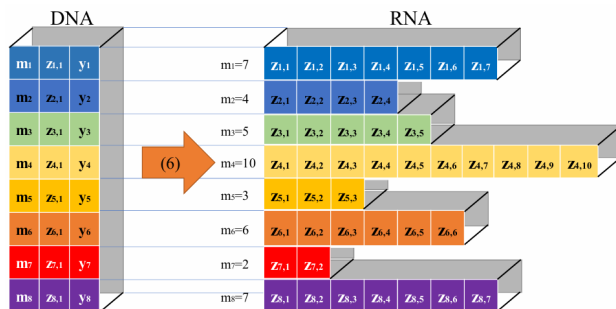


Fig. 2 The transcription process from DNA to RNA.

Content:

Metaheuristic algorithms (metaheuristics) efficiently provide high-quality approximate solutions for complex optimization problems in a short time.

Research 1: This study utilizes complex network theory to characterize metaheuristic search processes, identifying algorithms suited to specific problems. Preliminary applications to wind turbine layout optimization in wind farms achieved results surpassing those from MIT. Future work aims to build a generalizable framework for effective metaheuristic selection and improvement.

Research 2: A dynamic strategy introducing chaotic maps into genetic representations enables flexible element optimization, improving diversity and expanding the scope of variable-length metaheuristics. Applied to dendritic neuron model optimization, the method significantly reduced computational resources in classification tasks.

Keywords : metaheuristics, Complex Systems

E-mail: you.kaisen@tokushima-u.ac.jp

Tel. 088-656-7509

Fax: 088-656-7509

HP: <https://researchmap.jp/yanghaichuan>





Faculty of
Science and
Technology
Tokushima University

Image Processing Is Applied in the Fields of Agriculture and Biology

Designated Assistant Professor Kenshin Saitou




1. Early instar larva




1. Late instar larva



1. Detection feeding damage of pest insect

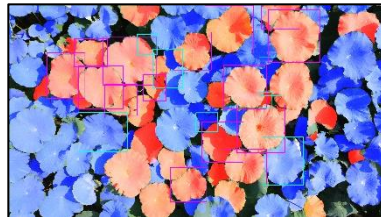

2. Insect classification



Content:

The number of agricultural workers in Japan's sole proprietorships has been declining in recent years. In response to these issues, smart agriculture, which utilizes robots and AI, is flourishing. Specifically, image technology utilizing cameras is being researched and developed for smart agriculture due to its lower implementation cost..

Therefore, we are applying image technology in the fields of agriculture and biology to improve production and reduce human effort.

1. Early detection of pest insects in lotus root fields using aerial imagery.

This research aims to automate pesticide spraying and reduce the spraying rate. We detect feeding damage from aerial imagery captured by UAVs to predict pest distribution.

2. Classification system of insect utilizing image of insect wing

This research aims to automatically classify insects to specify pest control methods.

Keywords: Computer Vision, Image Processing

E-mail: saitou.kenshin@tokushima-u.ac.jp

Tel. +81-88-656-9684







Faculty of
Science and
Technology
Tokushima University

Development of a Weakly Supervised Semantic Segmentation Model for Whole-Image Understanding

Designated Assistant Professor Izumi Fujimori

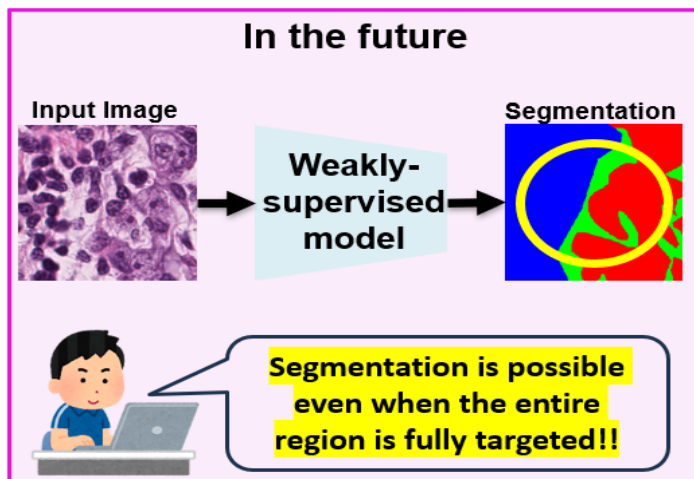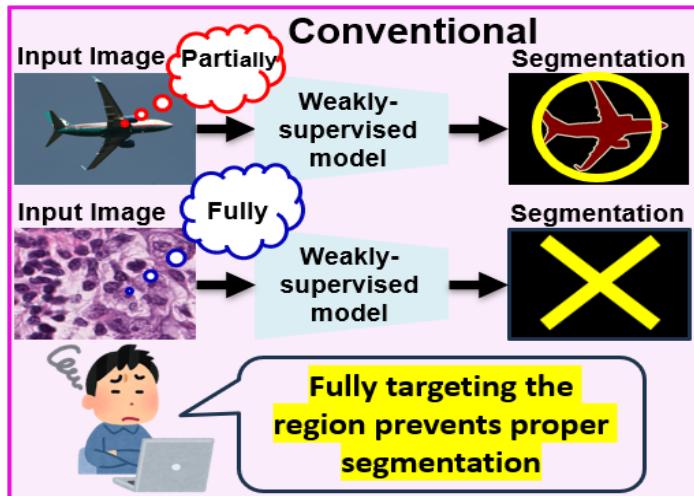

Content:

Weakly supervised semantic segmentation aims to build low-cost and practical segmentation models within the framework of weakly supervised learning, which does not require detailed annotations. Instead of pixel-level labels, the model is trained with coarse information such as the presence or absence of cancer in an image, greatly reducing annotation costs. Although Class Activation Maps (CAMs) are widely used to obtain region information, they tend to highlight only the most discriminative areas, detecting only part of the image and failing to segment the entire scene including the background.

To overcome this limitation, this study proposes a new method that can accurately segment the entire image from limited supervision. The proposed approach is applicable to various domains such as histopathology, coastal waste analysis, land cover classification, and autonomous driving, contributing to both efficient annotation and precise image understanding.

Keywords: Weakly supervised learning, Segmentation

E-mail: fujimori.izumi@tokushima-u.ac.jp

Tel. +81-88-656-7498

